


Highly flexible braided copper tapes (bare or tinned)

Product information

Further dimension or customized parts on request

FGBb = Copper bare

FGBv = Copper tinned

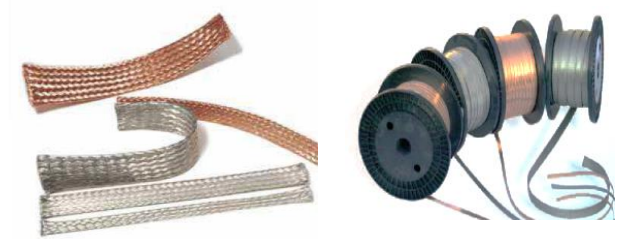

Dimension and technical specifications

Part-No.	Type	Cross section	Dimension Width x Thick. [mm x mm]	max. Current [Å]	Weight per Meter [kg]	No. per Set
C-FGBb-10	FGBb	10	13 x 1.0	80	0.10	°
C-FGBv-10	FGBv	10	13 x 1.0	80	0.10	°
C-FGBb-16	FGBb	16	15 x 1.5	120	0.16	°
C-FGBv-16	FGBv	16	15 x 1.5	120	0.16	°
C-FGBb-25	FGBb	25	23 x 1.5	150	0.25	°
C-FGBv-25	FGBv	25	23 x 1.5	150	0.25	°
C-FGBb-35	FGBb	35	23 x 2.5	195	0.35	°
C-FGBv-35	FGBv	35	23 x 2.5	195	0.35	°
C-FGBb-50	FGBb	50	28 x 3.0	250	0.50	°
C-FGBv-50	FGBv	50	28 x 3.0	250	0.50	°
C-FGBb-70	FGBb	70	30 x 3.5	290	0.70	°
C-FGBv-70	FGBv	70	30 x 3.5	290	0.70	°
C-FGBb-95	FGBb	95	40 x 4.0	340	0.95	°
C-FGBv-95	FGBv	95	40 x 4.0	340	0.95	°

On request °

All information without guarantee